

REGULATING UNIT FOR CENTRAL HEATING SYSTEM

Coplanar distribution manifold for Art. 715N, 725N, 735N, 735NM.

Available configurations: 2+1, 3+1, 4+1 and 5+1 ways with flat seat nut connections 1½" Female and 1" Male on added way.

Zinc plated carbon steel body.
Temperature range 0÷100°C.
With EPP insulation and wall mounting brackets.
Head connections 1¼" F with 140 mm centre distance.
Centre distance 125 mm.



Technical data


Insulation:

Material: EPP
Density: 45 kg/m³
Operating temperature: -5÷120 °C
Thermal conductivity: 0,037 W/(m·K) at 10 °C
Reaction to fire classification (UL94): HBF

Manifold:

Material: Zinc plated carbon steel
Operating temperature: 0÷100 °C
Maximum operating pressure: 8 bar
Maximum test pressure: 16 bar
Flow Coefficient of the single delivery: KV=23

Dimensions

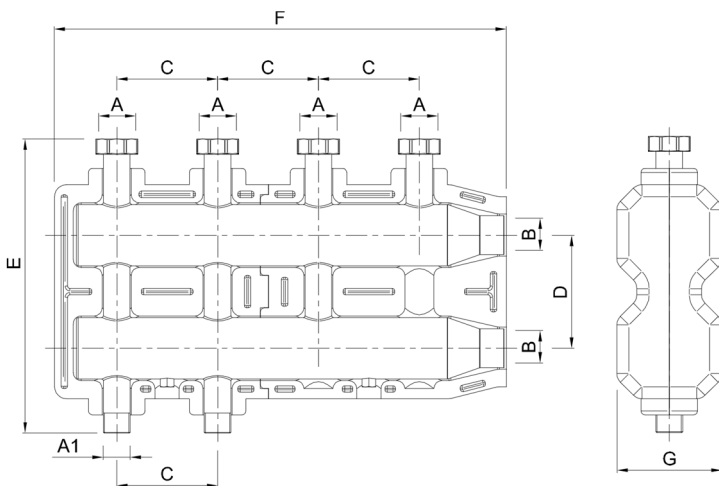

Art.	A	B	C	D	E	A1	F	G
745-21	1 ½"F	1 ¼"F	125	140	364	1"M	560	125
745-31	1 ½"F	1 ¼"F	125	140	364	1"M	810	125
745-41	1 ½"F	1 ¼"F	125	140	364	1"M	1060	125
745-51	1 ½"F	1 ¼"F	125	140	364	1"M	1310	125

Wall-mounting sequence

