

MULTILAYER PIPE COMPRESSION FITTINGS FOR VALVES DESIGN SERIES

Application

The te-sa pre-assembled compression fittings **217HT** is designed to connect multilayer pipes at radiator valves DESIGN series.

Made of high-quality materials, are available with nut polish chrome plated.

These fittings allow to fit the pipe at the valves installed on towel radiators with high aesthetic level and reliability in the service time.

These series of compression fittings can be used in combination with valves 3/4" thread connection, on the most commercially available pipe sizes.


All **te-sa** fittings are fully manufactured in Italy.



Technical data

- Nut made of forged brass UNI-EN12165 CW617N
- Adaptor body made of machined brass UNI-EN12164 CW614N
- Retaining ring made of brass UNI-EN12164 CW614N
- O-ring seals made of compound EPDM-PX
- Nut threaded G3/4" for Eurocone connection
- Maximum operating temperature 90 °C
- Maximum operating pressure 10 bar
- Suitable with heating water additioned with glycol solutions at maximum percentage of 30%
- Nut polish chrome plated

Dimensions

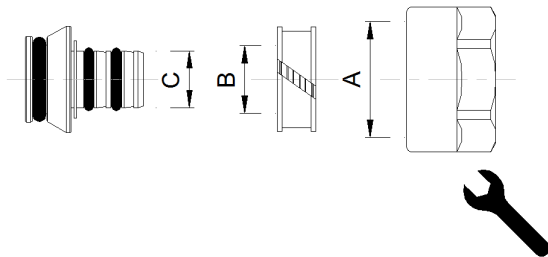

Art.	A	B	C	⚙
217HT-14020	3/4"	Ø14,3	Ø9,8	27
217HT-16020	3/4"	Ø16,3	Ø11,8	27
217HT-16022	3/4"	Ø16,3	Ø11,4	27
217HT-17020	3/4"	Ø17,3	Ø12,8	27
217HT-18020	3/4"	Ø18,3	Ø13,8	27
217HT-20020	3/4"	Ø20,3	Ø15,8	27
217HT-20025	3/4"	Ø20,3	Ø14,8	27